



### »» Features:

- Pure sine wave output
- Output power factor 1.0
- Programmable supply priority for PV ,battery or Grid
- User-adjustable charge current and voltage
- Wide PV input range (120Vdc -500Vdc), 110A MPPT SCC
- Working without batteries in sunny day
- WiFi Monitoring Function (optional)
- Anti-dusk kit for harsh environment(optional)
- LCD remote control with 5/10/20 meters wire(optional)
- PV and electricity complementary
- Use with lithium batteries
- Parallel operation up to 6 units
- Remove LCD


## HGP PRO SERIES

离网太阳能逆变器 Off Grid Solar Inverter  
HGP PRO 3500VA/3500W 5500VA/5500W

SUMRY

Shenzhen Sumry Electronics Co., Ltd.

Parallel operation up to 6 units

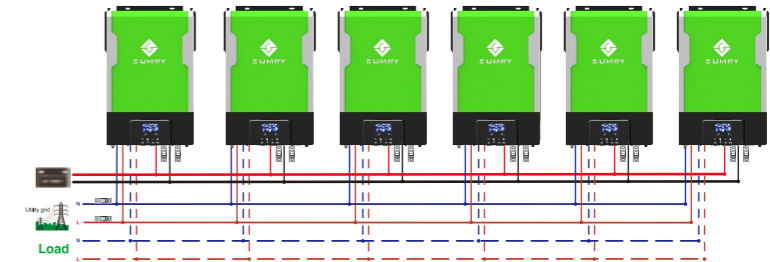

### »» Product Data Sheet

MODEL	HGP-3500W PRO	HGP-5500W PRO
Rated Power	3500VA/3500W	5500VA/5500W
<b>INPUT</b>		
Voltage	230VAC	
Selectable Voltage Range	170-280VAC(for personal computers) 90-280VAC(for home appliances)	
Frequency Range	50Hz/60Hz (Auto sensing)	
<b>OUTPUT</b>		
AC Voltage Regulation (Batt.Mode)	230VAC±5%	
Surge Power	7000VA	11000VA
Efficiency(Peak) PV to INV	97%	
Efficiency(Peak) BAT to INV	94%	
Transfer Time	10ms (for personal computers) 20ms (for home appliances)	
Wave Form	Pure Sine Wave	
<b>BATTERY &amp; AC CHARGER</b>		
Battery Voltage	24VDC	48VDC
Floating Charge Voltage	27VDC	54VDC
Overcharge Protection	31VDC	61VDC
Maximum Charge Current	80A	80A
<b>SOLAR CHARGER</b>		
MAX.PV Array Power	5000W	6000W
MPPT Range@ Operating Voltage	120-500VDC	
Maximum PV Array Open Circuit Voltage	500VDC	
Maximum Charging Current	110A	
Maximum Efficiency	98%	
<b>PHYSICAL</b>		
Dimension.D*W*H(mm)	472*298*143	
Net Weight (kgs)		
Communication Interface	RS485/RS232(Standard) LCD remote/WIFI(Optional)	
<b>OPERATING ENVIRONMENT</b>		
Humidity	5% to 95% Relative Humidity(Non-condensing)	
Operating Temperature	0°C to 55°C	
Storage Temperature	-15°C to 60°C	